


## SPECIFICATIONS

Size	Metric	British
Max. Working Height <b>A</b>	19.00m	62ft 4.0in
Max. Platform Height <b>B</b>	17.00m	55ft 9in
Overall Length <b>C</b>	3.76m	12ft 4in
Overall Width <b>D</b>	1.25m	4ft 1in
Overall Height(Rails Up) <b>E</b>	3.24m	10ft 8in
Overall Height(Rails Down) <b>F</b>	2.47m	8ft 1in
Platform Size(Length×Width)	3.44m×1.17m	11ft 3in × 3ft 10in
Platform Extension Size <b>G</b>	1.20m	3ft 11in
Ground Clearance(Stowed/Raised)	0.15m/0.025m	6in/1in
Wheelbase <b>H</b>	2.89m	9ft 6in
Turning Radius(Inside/Outside)	1.00m/3.50m	3ft 3in/11ft 6in
Tyres	22×9×16	22×9×16

Performance		
S.W.L	500kg	1102lb
S.W.L On Extension	500kg	1102lb
Max. Occupants (Indoor/Outdoor)	2/0	2/0
Gradeability	30%	30%
Travel Speed(Stowed)	4.5km/h	2.80mph
Travel Speed(Raised)	0.4km/h	0.25mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	70/76sec	70/76sec

Weight		
Overall Weight	7140kg	15741lb

Power		
Hydraulic Tank	50L	13.2gal
Battery	48V/360Ah	48V/360Ah
Charger	48V/60A	48V/60A
Driving Motor	2×32VAC/3.3kW	2×32VAC/3.3kW
Lifting Motor	48VDC/12.0kW	48VDC/12.0kW

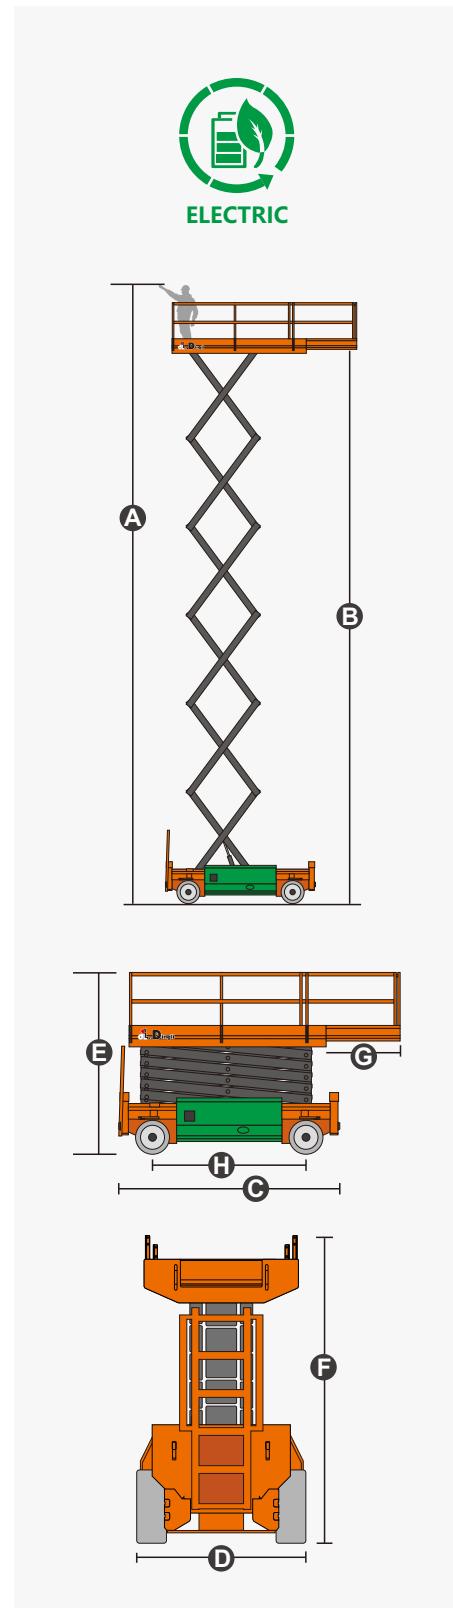

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Solid Rubber Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Brake System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: [export@cndingli.com](mailto:export@cndingli.com)

<https://en.cndingli.com>